



GYPSTAR

MULTIPURPOSE JOINT COMPOUND

TGS 8801

PRODUCT DATA SHEET

Product Description

Gypstar Multipurpose Joint Compound is a pre-mixed drying multipurpose joint compound specially formulated for professional applications. It is a lightweight product used for gypsum boards for filling and repairing minute hairline cracks on both new and old interior surfaces. It can also be used as a skim coat on gypsum boards and will give a smooth and high quality finish for further work. Gypstar joint compound is versatile, has excellent coverage, bonding and adhesive properties when compared to similar products. This product has anti-fungal properties from the additives in it.

Preparation & Application

Stir the compound lightly before use. Normally no addition of water or any solvent/liquid is required. However, if found too thick for application, a little water can be added; stir gently before mixing. The compound can be used directly from the container when used for covering embedded fasteners, corner beads and trims. After use, close the lid tightly and store at room temperature.

Before application make sure the surface is clean, without any foreign particles or dust and the surface doesn't show signs of flaking or disintegrating. After cleaning of the surface and prior to patch work with Gypstar Joint Compound, it is recommended that the surface be coated with PRIMSTAR Primer. After the patch work with the compound is over and is completely dry, a second coat of the Primer may be applied. Drying times vary depending on the Joint Compound and the ambient conditions. If necessary, use sandpaper lightly over the final dry surface for a smooth finish.

Tools and equipment should always be cleaned out with water and wiped dry to ensure smooth re-use.

Health & Safety


Prolonged contact with eyes and skin is not recommended. Always wear protective eye-gear and overalls. Detailed information is given in the MSDS. Affected areas should be washed with plain water immediately; seek medical attention if necessary.

Packing & Storage

Gypstar Multipurpose Joint Compound is packed in 5kg and 28kg plastic pails.

Store in a clean, dry place. Always avoid completely direct sunlight and extremes of heat and cold.

Lid should be closed tightly after use. If stored unopened in good condition, product will have a shelf life of 12 months. Always follow first-in-first-out policy.

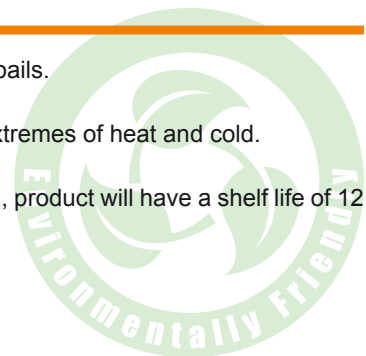



GYPSTAR

MULTIPURPOSE JOINT COMPOUND

TGS 8801

PRODUCT DATA SHEET

Product Technical Data

Product	Pre-mix Multipurpose Joint Compound
Usage	To fill joints and finish gypsum boards
Dilution	Water, if required.
Density	1.75
Types	Hand or mechanical application
Consumption	1.75 kg/m/mm thickness depending on surface conditions
Storage	12 months in Original unopened condition
Packaging	5 kg and 28 kg Plastic pails

TRIMIX offers a complete range of products for spray plastering and all-surface finishing.

Technical Service is offered by Trimix LLC's Technical Service Department (TSD). A team of Sales/Demonstration Instructors is always available for technical assistance to the Customers on the correct usage of our products. The information given in this leaflet is based on laboratory research as well as extensive field work and application and its present state of knowledge and intended to provide general information on the products and methods of usage. All products are subject to standard conditions of sale which are available on request. Prospective users are advised to determine the suitability of the products and suggestions before adopting them on a commercial scale. Trimix is not liable for any incidental or consequential damages directly or indirectly sustained nor for any loss caused by application of the product(s) not in accordance with instructions or for other than their intended use. Any claim shall be deemed waived unless made in writing to us with 15 days from the date it was or reasonably should have been discovered.

Notice: The yield and coverage of the product given in the data sheet is an approximate figure. The actual coverage depends on various factors such as thickness of plaster, wastage, imperfections of the background, and the skill of the applicator. It is the responsibility of users to monitor the coverage of plaster according to the site condition. No claim will be entertained by Trimix on such matters.

